



F&F Filipowski sp. j.
Konstantynowska 79/81 95-200 Pabianice
phone/fax: (+48 42) 215 23 83 / 227 09 71 POLAND
http://www.fif.com.pl e-mail: fif@fif.com.pl

ELECTRONIC BI-STABLE
PULSE RELAY

BIS-411-LED
230V


WARRANTY. The F&F products are covered by a warranty of the 24 months from the date of purchase. Effective only with proof of purchase. Contact your dealer or directly with us. More information how to make a complaint can be found on the website:
www.fif.com.pl/reklamacje



Do not dispose of this device to a garbage bin with other unsorted waste!
In accordance with the Waste Electrical and Electronic Equipment Act any household electro-waste can be turned in free of charge and in any quantity to a collection point established for this purpose, as well as to the store in the event of purchasing new equipment (as per the old for new rule, regardless of brand). Electro-waste thrown in the garbage bin or abandoned in the bosom of nature pose a threat to the environment and human health.

PURPOSE

Electronic bi-stable pulse relays BIS-411-LED 230V enables the user to actuate lighting or other devices from various locations by means of control buttons in parallel connection.

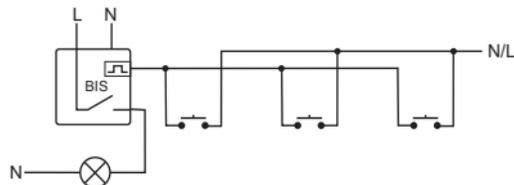

FUNCTIONING

The receiver is actuated by means of a current pulse triggered by pushing any bell push connected to the relay. The receiver is deactivated by another pulse or after a preset time. The relay does not "memorize" the position of the relay contact, i.e. in case of supply voltage decay and the subsequent return of supply voltage, the relay contact will be set in the off position. Such a solution prevents the automatic actuation of the receivers controlled that might occur without proper supervision after a long-lasting decay of supply voltage.


Relay version "LED" is to pin adapted to cooperate with the receivers with high starting current, such as LED fluorescent lamps, ESL fluorescent lamps, electronic transformers, discharge lamps, etc.

ASSEMBLY

1. Turn OFF the power.
2. Put on the relay on the rail in the switchgear box.
3. Connect the power cable to contacts 1-3 with accordance chosen control option the relay (control impulse L or N).
4. The timers switching which are connect in parallel connect to contact 6 and to cable which is connect to contact 3.
5. The activated receiver connect in series to contacts 11-12.
6. By screwdriver set to switching OFF delay.

ATTENTION!

The BIS-411-LED 230V is compatible with bell pushes equipped with fluorescent lamps ($\Sigma I < 5\text{mA}$).



TECHNICAL DATA


power supply
contact / current load AC-1
control pulse
max current control buttons
activation delay
signalling of supply voltage
signalling of activation
power consumption
standby
on
working temperature
connection
tightening torque
dimensions
fixing
ingress protection

230V AC
separated 1 C/O / 16A
110÷265V AC < 20mA
Σ5mA
0.1÷0.2sec
green LED
red LED


0,15W
0,6W
-25÷50°C
2,5mm² screw terminals
0.4 Nm
1 module (18mm)
on the TH-35 rail
IP20

WIRING DIAGRAM

control impulse: N



control impulse: L



SUPPLY

1-3 power relay: 100-265V AC

CONTROL INPUTS

6 control inputs

CONTACT

11 power input contact COM
10 output: NC contact (passive)
12 output: NO contact (active)

Example of relay connection with N control pulse

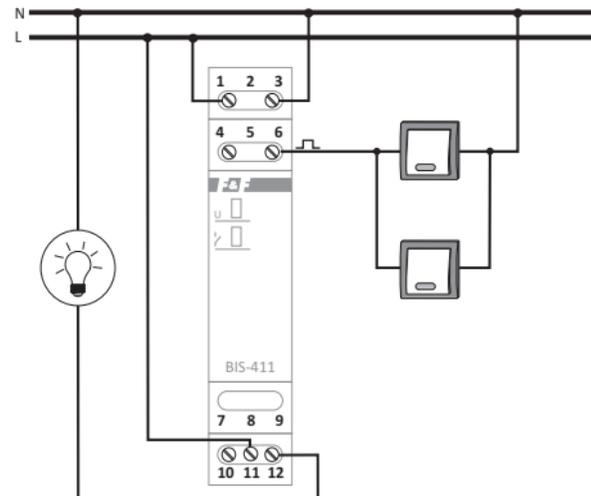


Table of power

incandescent	halogen	fluorescent	energy-saving	LED
2000W	1250W	1000W	500W	250W

The above data are indicative and will heavily depend on the design of a specific receiver (that is especially important for LED bulbs, energy-saving lamps, electronic transformers and pulse power supply units), switching frequency and operating conditions.

For more information visit www.fif.com.pl