



F&F Filipowski L.P.  
Konstantynowska 79/81, 95-200 Pabianice, POLAND  
phone/fax (+48 42) 215 23 83 / (+48 42) 227 09 71  
www.fif.com.pl; e-mail: biuro@fif.com.pl

## PP-1P Pico

Miniature  
electromagnetic relay



5190243116760051

**Do not dispose of this device in the trash along with other waste!**

According to the Law on Waste, electro coming from households free of charge and can give any amount to up to that end point of collection, as well as to store the occasion of the purchase of new equipment (in accordance with the principle of old-for-new, regardless of brand). Electro thrown in the trash or abandoned in nature, pose a threat to the environment and human health.



### Purpose

Electromagnetic relay in housing for direct installation in flush-mounted  $\varnothing 60$  box.

### Functioning

Applying the supply voltage to terminals 1-3 will switch the relay on (closing the contact between terminals 5-6).

After switching off, the contact between terminals 4-5 is closed. The relay coil is supplied with 230 V, the relay contacts are galvanically separated from the relay coil supply.

## Mounting

1. Disconnect the power supply.
2. Install the relay in the flush-mounted box.
3. Connect the power supply: N to terminal 3; L to terminal 1 or 2.
4. Connect the power supply circuit of the controlled consumer via contacts 5-6 when using the NO (normally open) contact or 4-5 when using the NC (normally closed) contact.




For the same power source for relay and controlled receiver can perform a „bridge” between the feed point 2 and relay COM contact (terminal 5).

## Wiring diagram



PP-1P Pico is compatible with backlit buttons.

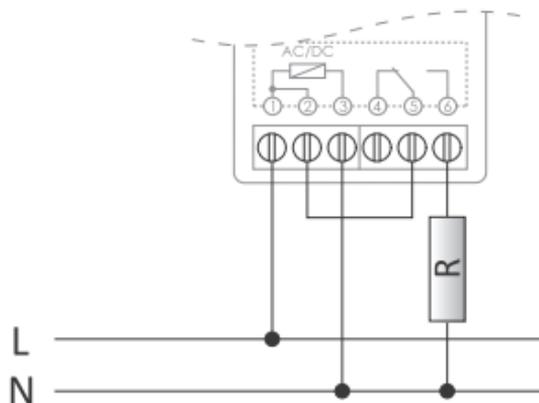

- 1-2 L power supply (terminals connected internally)
- 3 N power supply
- 4 NC contact (normally closed)
- 5 COM contact (common)
- 6 NO contact (normally open)

## Technical data

power supply	100÷265 V AC
contact	1×NO/NC
maximum load current (AC-1)	16 A, 250 V AC
usage category	AC-7a
activation time	max 20 ms
deactivation time	max 200 ms
mechanical durability	min. $5 \times 10^6$
power indication	green LED
power consumption	
standby	0.15 W
on	0.6 W
terminal	2.5 mm <sup>2</sup> screw terminals
tightening torque	0.4 Nm
working temperature	-25÷50°C
dimensions	35×36×19 mm
mounting	in flush-mounted Ø60 box
ingress protection	IP20

## Power table

Table for loads supplied with 230 V AC:

				
tungsten	halogen	fluorescent	energy-saving	LED
3000 W	2500 W	1500 W	750 W	750 W

The above data are indicative and will heavily depend on the design of a specific receiver (that is especially important for LED bulbs, energy-saving lamps, electronic transformers and pulse power supply units), switching frequency and operating conditions.

For more information visit: [www.fif.com.pl](http://www.fif.com.pl).

## Warranty

The F&F products are covered by a warranty of the 24 months from the date of purchase. Effective only with proof of purchase. Contact your dealer or directly with us.

## CE declaration

F&F Filipowski L.P. declares that the device is in conformity with the essential requirements of The Low Voltage Directive (LVD) 2014/35/EU and the Electromagnetic Compatibility (EMC) Directive 2014/30/UE.

The CE Declaration of Conformity, along with the references to the standards in relation to which conformity is declared, can be found at [www.fif.com.pl](http://www.fif.com.pl) on the product page.