



F&F Filipowski sp. j.
Konstantynowska 79/81, 95-200 Pabianice, POLAND
phone/fax (+48 42) 215 23 83 / (+48 42) 227 09 71
www.fif.com.pl; e-mail: biuro@fif.com.pl

ZI-USB-5

USB power supply



Do not dispose of this device in the trash along with other waste!

According to the Law on Waste, electro coming from households free of charge and can give any amount to up to that end point of collection, as well as to store the occasion of the purchase of new equipment (in accordance with the principle of old-for-new, regardless of brand). Electro thrown in the trash or abandoned in nature, pose a threat to the environment and human health.




Purpose

The ZI-USB-5 is used to power electrical and electronic devices via the standard A-type USB output.

Mounting

1. Turn off the power.
2. Connect the power cables to the input terminals 1-3 of the power supply in accordance with the markings: 1 (+) and 3 (-).
3. Connect the cable with the USB A plug to the socket located at the bottom of the module.

Connection diagram

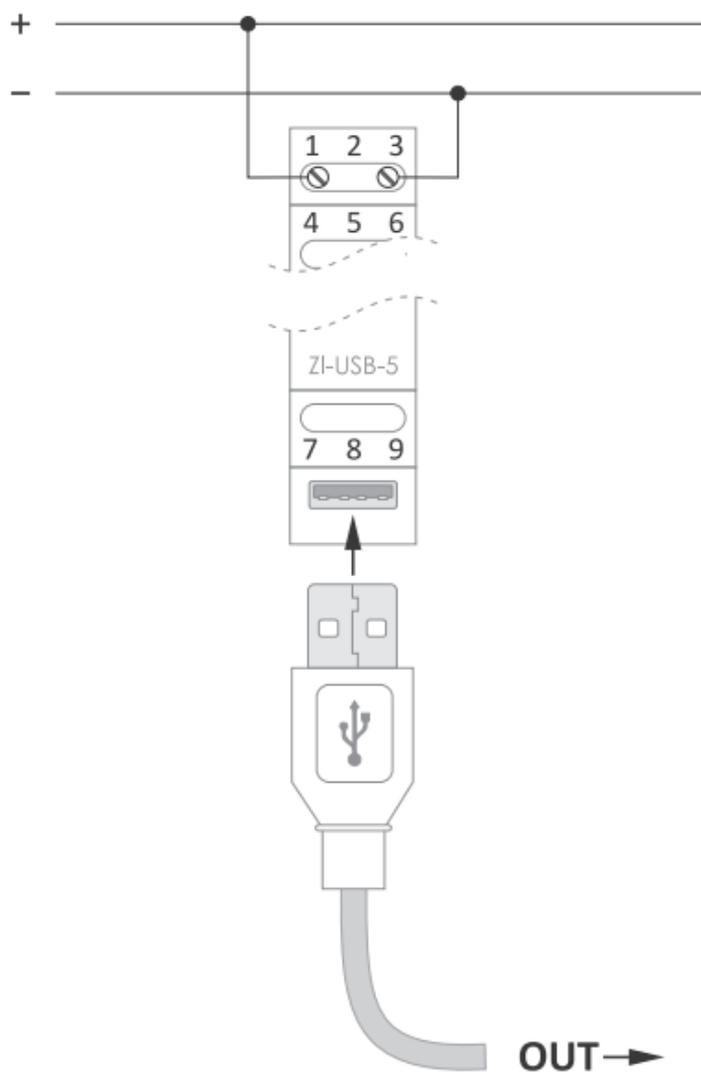

Technical data

input voltage	12÷40 V DC
output voltage	5 V DC
output current	2.1 A
output power	10.5 W
current limitation	I _{max} =110% I _{out}
load minimum	0%
terminal	2.5 mm ² screw terminals
tightening torque	0.4 Nm
output	USB port
working temperature	0÷40°C
dimensions	1 module (18 mm)
mounting	on TH-35 rail
protection level	IP20

Warranty

F&F products are covered by a 24-month warranty from the date of purchase. The warranty is only valid with proof of purchase. Contact your dealer or contact us directly.

CE declaration

F&F Filipowski sp. j. declares that the device is in conformity with the essential requirements of The Low Voltage Directive (LVD) 2014/35/EU and the Electromagnetic Compatibility (EMC) Directive 2014/30/UE.

The CE Declaration of Conformity, along with the references to the standards in relation to which conformity is declared, can be found at www.fif.com.pl from the product subpage.

«F&F»[®]