



F&F Filipowski sp. j.
Konstantynowska 79/81, 95-200 Pabianice, POLAND
phone/fax (+48 42) 215 23 83 / (+48 42) 227 09 71
www.fif.com.pl; e-mail: biuro@fif.com.pl

ZI-17

Pulse power supply,
stabilized



Do not dispose of this device in the trash along with other waste!

According to the Law on Waste, electro coming from households free of charge and can give any amount to up to that end point of collection, as well as to store the occasion of the purchase of new equipment (in accordance with the principle of old-for-new, regardless of brand). Electro thrown in the trash or abandoned in nature, pose a threat to the environment and human health.




Purpose

ZI-17 is used to supply electrical and electronic equipment that requires a stable, filtered supply voltage independent of the mains voltage changes.

Mounting

1. Turn off the power.
2. Connect the power cables to the power supply input terminals: terminal 1 to L and terminal 3 to N.
3. Connect the receiver to the output terminals of the power supply in accordance with the markings: (+) to terminal 10, (-) to terminal 12.

Wiring diagram

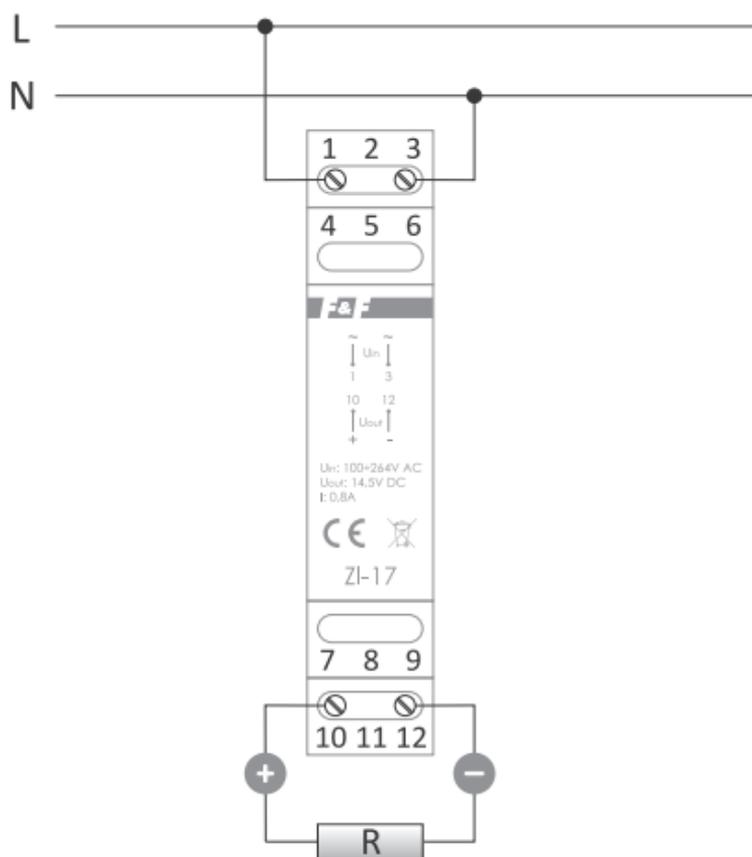

Technical data

input voltage	100÷264 V AC
output voltage	14.5 V DC
output current	0.8 A
output power	12 W
current limitation	110% I _{out}
load minimum	0%
keying frequency	70 kHz
terminal	2.5 mm ² screw terminals
tightening torque	0.4 Nm
working temperature	-10÷40°C
dimensions	1 module (18 mm)
weight	80 g
mounting	on TH-35 rail
protection level	IP20

Warranty

F&F products are covered by a 24-month warranty from the date of purchase. The warranty is only valid with proof of purchase. Contact your dealer or contact us directly.

CE declaration

F&F Filipowski sp. j. declares that the device is in conformity with the essential requirements of The Low Voltage Directive (LVD) 2014/35/EU and the Electromagnetic Compatibility (EMC) Directive 2014/30/UE.

The CE Declaration of Conformity, along with the references to the standards in relation to which conformity is declared, can be found at www.fif.com.pl from the product subpage.