



F&F Filipowski sp. j.
Konstantynowska 79/81, 95-200 Pabianice, POLAND
phone/fax (+48 42) 215 23 83 / (+48 42) 227 09 71
www.fif.com.pl; e-mail: biuro@fif.com.pl

WB-2

3-position switch



519024311674803

Do not dispose of this device in the trash along with other waste! According to the Law on Waste, electro coming from households free of charge and can give any amount to up to that end point of collection, as well as to store the occasion of the purchase of new equipment (in accordance with the principle of old-for-new, regardless of brand). Electro thrown in the trash or abandoned in nature, pose a threat to the environment and human health.





Purpose

The WB-2 three-position switch is used to control devices from the switchboard. It allows you to alternately trigger one of the two outputs.

Mounting

1. Disconnect the power supply.
2. Install the switch on the rail in the distribution board.
3. Connect the power wires according to the diagram.
4. Check the correct connection.
5. Connect the power supply.
6. Check the correct operation of the system.

Wiring diagram

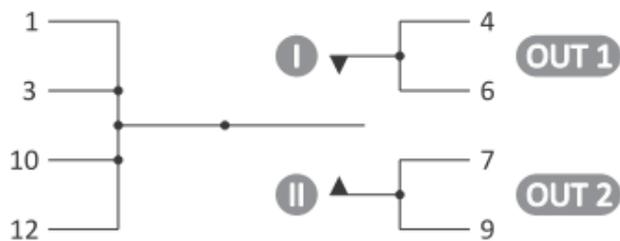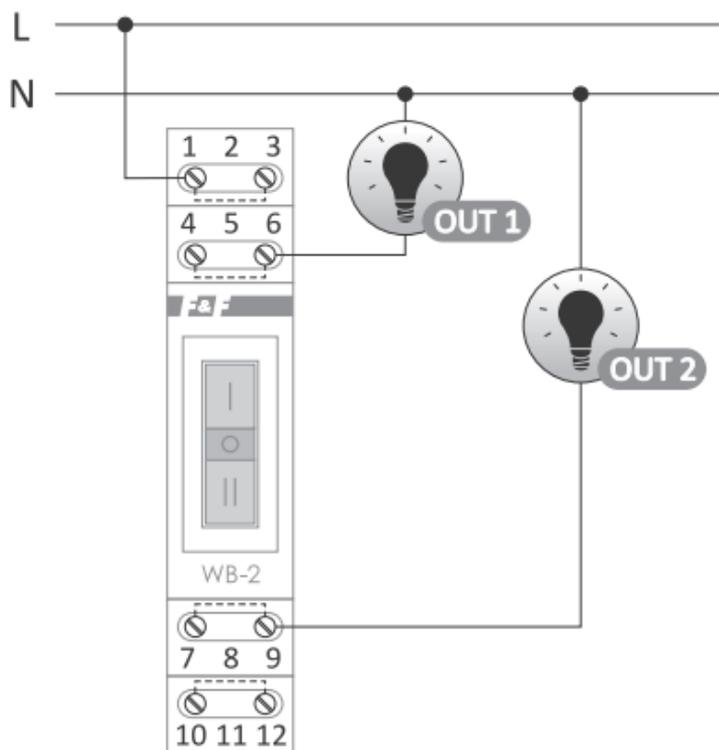

Description of terminals

1, 3, 10, 12	COM input
4, 6	output 1
7, 9	output 2

Technical data

contact	ON-OFF-ON
maximum operating voltage	250 V AC
maximum load current (AC-1)	15 A (250 V AC) 20 A (125 V AC)
contact resistance	max 35 mΩ
contact life	10.000 cycles
terminal	2.5 mm ² screw terminals
tightening torque	0.4 Nm
working temperature	-25÷50°C
dimensions	1 module (18 mm)
mounting	on TH-35 rail
ingress protection	IP20

Warranty

F&F products are covered by a 24-month warranty from the date of purchase. The warranty is only valid with proof of purchase. Contact your dealer or contact us directly.

CE declaration

F&F Filipowski sp. j. declares that the device is in conformity with the essential requirements of The Low Voltage Directive (LVD) 2014/35/EU and the Electromagnetic Compatibility (EMC) Directive 2014/30/UE.

The CE Declaration of Conformity, along with the references to the standards in relation to which conformity is declared, can be found www.fif.com.pl on the product subpage.