



F&F Filipowski sp. j
ul. Konstancynowska 79/81
95-200 Pabianice POLAND
tel/fax 48 42 2270971
e-mail: fif@fif.com.pl

ASO-24

STAIRCASE TIMERS



www.fif.com.pl

F&F products are covered by an 24 months warranty from date of purchase

PURPOSE

Staircase timer ASO-24 serves to keep switched-ON lighting of staircase, corridor, or any other object for the set time and to switch-OFF this lighting automatically, upon elapse of this set time.

FUNCTIONING

Turned ON staircase timer supports the lighting during set time by potentiometer (from 0,5min. to 10min.). After passage of set time timer will switch OFF the lighting automatically. After switching OFF the lighting there is possibility to switch it ON again.

ATTENTION!

The ASO-24 is not adapted to co-operate with pushbuttons equipped with neon lamp.


ASSEMBLY

1. Fast the relay to substrate by 2 screws.
2. Take OFF the power.
3. Connect the relay to circuitry with wiring diagram.
4. Take off a gum pin which protect a potentiometer.
5. By flat screwdriver 4mm set to switching threshold.
6. Take on a gum pin after to set.

TECHNICAL DATA

supply	24V AC
current load	<10A
switching OFF delay (to set)	0,5÷10min
switching ON delay	<1sec
power consumption	0,56W
connection	OMY 3×0,75mm ² , l=0,45m
working temperature	-25÷50°C
dimensions	50×67×26mm
fixing	2 screws to substrate

WIRING DIAGRAM

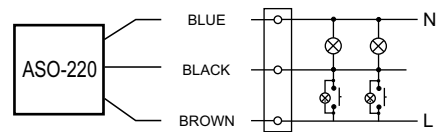

A090405